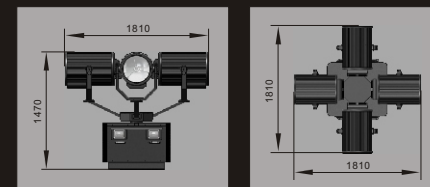


工程型 /project type

户外±360° 旋转 (3/4/5/6头) 空中大炮灯
Outdoor±360° Rotating (3/4/5/6 heads) Space cannon light

特殊功能定制配置表 / Special function configuration table:

配置类型 Type	功能 (外控另配电脑脱机控制器) Function (External control with another computer offline controller)
标准同步型 Standard synchronous type	多台X轴同步内控自走程序, DMX512外控任意编程 Multiple machine X- axis synchronous internal Control program, DMX512 external control and any programming
动态频闪型 Dynamic stroboscopic type	多台X轴同步内控自走程序, DMX512外控任意编程, 动态频闪调光外控任意编程 Multiple machine X- axis synchronous internal Control program, DMX512 external control and any programming, strobeflash, External control, dimming and external control
七彩变色型 7 colour change type	多台X轴同步内控自走程序, DMX512外控任意编程, 动态频闪调光外控任意编程, CMY 七彩变色外控任意编程 Multiple machine X- axis synchronous internal Control program, DMX512 external control and any programming, External control, dimming and external control, CMY 7 colour change

技术参数

- 型号: GDP/±360° -XBO (3~6) ×3000/4000/5000/7000W
- 电源: AC380V±5%/50Hz(3P+N+E)
- 光源: XBO-3000/4000/5000/7000W(球型直流氙灯)
- 光束数量: 3/4/5/6束
- 旋转角度: X轴±360° 自动正返转动, Y轴手动调节60°
- 光束颜色: 白、玫瑰红、黄、绿、蓝
- 彩色滤光片: 玫瑰红、黄、绿、蓝为选购配件
- 反光器: φ400/356/325/300mm玻璃
- 光束角: 0~10° 可调
- 光源焦点: X、Y、Z可微调
- 传动方式: 步进电机通过蜗轮减速传动
- 控制方式: DMX控制器控制; 主从机控制(内置演示程序)
- 通道数: 5 Ch (详见附表)
- 防护等级: IP44
- 灯具结构: 灯头采用组合方式, 方便安装运输
- 功能: 光束X轴±360° 圆周旋转、Y轴手动调节固定仰角、光束颜色可以任意组合
- 用途: 可用于广场、公园、高层建筑、城市制高点、江河沿岸的空中大场面造景; 该类型的灯具主要用于对灯光效果要求比较高的又需要特殊编程效果的工程使用

Technical features

- Model type: GDP/±360° -XBO (3~6) ×3000/4000/5000/7000W
- Power supply: AC380V±5%/50Hz(3P+N+E)
- Bulb: XBO-3000/4000/5000/7000W(SPHERE XENON LAMP)
- Light beam quantity: 3/4/5/6 light beam
- Rotation angle: X axis ±360° positive and negative autorotate, Y axis 60° manual adjust
- Light beam color: White, rose, yellow, green, blue
- Color filter: Rose, yellow, green, blue as selective component
- Reflector: φ400/356/325/300mm glass
- Beam angle: 0~10° adjustable
- Bulb focus: X、Y、Z can slightly adjustable
- Move way: Stepping motor through the worm gear deceleration transmission
- Control mode: DMX 512 controller control; Main and following machine control(Built-in demo procedure)
- Channel quantity: 5 Ch (see the attached list)
- Protect level: IP44
- Light structure: Lamp holder in combined way, convenient in installation and transportation
- Function: Light beam X axis ±360° circle rotate, Y axis manual adjust fixed elevation, Light color can be arbitrary combination
- Applications: Squares, parks, high buildings, high places, Rivers coast

DMX512通道
DMX512 channel standard

Ch1	X 轴旋转 (8 bit) X axis rotation (8bit)	0° Rotation 350° 255°
Ch2	X-Y 旋转速度 X-Y speed	1~3转/分 1~3 rotate / minute
Ch3	调光 / Dimming	10~100%
Ch4	频闪 / Strobeflash	1~15f/s
Ch5	复位 / Reset	Reset

规格型号 Model type	射程 (白光) km Light distance(white color)	外观尺寸mm Appearance size	包装尺寸mm Package size	重量kg Weight
GDP/±360° -XBO(3~6)×3000W	2~3	1900×1900×1500	1000×600×1060: 1件 740×620×740: (3~6)4件	
GDP/±360° -XBO(3~6)×4000W	3~4	1900×1900×1500	1000×600×1060: 1件 740×620×740: (3~6)4件	
GDP/±360° -XBO(3~6)×5000W	4~5	1900×1900×1500	1000×600×1060: 1件 740×620×740: (3~6)4件	
GDP/±360° -XBO(3~6)×7000W	5~7	1900×1900×1500	1000×600×1060: 1件 740×620×740: (3~6)4件	