


工程型 / Engineering type

户外空中玫瑰灯 (XBO 光源) Outdoor sky rose light (XBO light source)



DMX512通讯同步方式:
主从机方式: (固定程序, 无控制器);
可编程序方式: (多种程序, 带脱机或联机控制器);

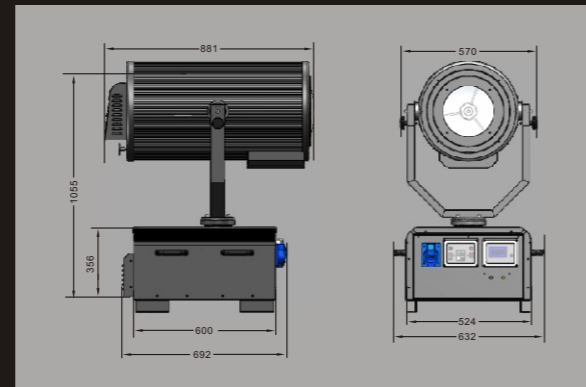


特殊功能定制配置表 / Special function configuration table:

配置类型 Type	功能 (外控另配电脑脱机控制器) Function (External control with another computer offline controller)
标准同步型 Standard synchronous type	多台X轴同步内控自走程序, DMX512外控任意编程 Multiple machine X-axis synchronous internal control program, DMX512 external control and any programming
动态频闪型 Dynamic stroboscopic type	多台X轴同步内控自走程序, DMX512外控任意编程, 动态频闪调光外控任意编程 Multiple machine X-axis synchronous internal control program, DMX512 external control and any programming, stroboflash, External control, dimming and external control
七彩变色型 7 colour change type	多台X轴同步内控自走程序, DMX512外控任意编程, 动态频闪调光外控任意编程, CMY七彩变色外控任意编程 Multiple machine X-axis synchronous internal control program, DMX512 external control and any programming, External control, dimming and external control, CMY 7 colour change

技术参数

- 型号: GTK/DMX-XBO3000W/4000W/5000W/7000
- 电源: AC220V ± 5% / 50Hz (1P+N+E)
- 光源: XBO-3000W/4000W/5000W/7000W (球型直流氙灯)
- 光束颜色: 白色、彩色 (可预订选择)
- 光束数量: ≤ 36束 (可预订选择)
- 旋转角度: X-轴 350° 内置角度和旋转方向任意设置, Y-轴 60° 手动调节
- 传动方式: 步进电机通过蜗轮减速传动
- 控制方式: DMX控制器控制; 主从机控制 (内置演示程序)
- 通道数: 3/5 Ch (详见附表)
- 防护等级: IP44
- 用途: 可用于广场、公园、户外演出、中低层建筑、城市制高点、江河沿岸的中近距离观赏场所。该类型的灯具主要用于对灯光效果要求比较高的又需要特殊编程效果的工程使用

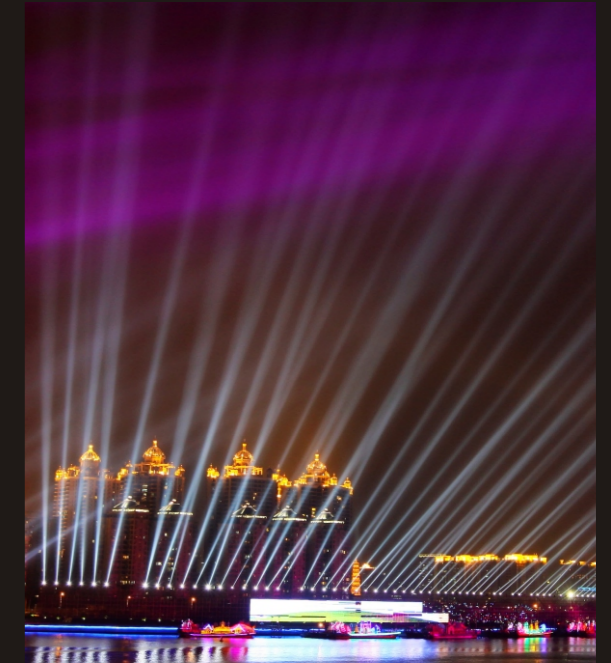

Technical features

- Model type: GTK-XBO3000W/4000W/5000W/7000
- Power source: AC220V ± 5% / 50Hz (1P+N+E)
- Lighting source: XBO-3000W/4000W/5000W/7000W (sphere DC xenon lights)
- Light beam color: White, color (booking of choice)
- Light beam: ≤ 36 beam (booking of choice)
- Rotating angle: X-shaft 110° automatic adjustment, Y-shaft 60° Manual adjustment
- Transmission way: Ac motor machinery transmission linkage mechanism
- Protection level: IP44
- Function: Beam 360° inboard turning, level 110° automatic scanning
- Applications: Squares, parks, high-rise buildings, high places of cities, broad sky sceneries along rivers

DMX512通道 / 3ch:

DMX512 channel standard / 3ch:

Ch1	X轴旋转 (8 bit) X axis rotation (8 bit)	0° Rotation 350°	255°
Ch2	X-Y 旋转速度 X-Y speed	1-7 转/分 1-7 rotate / minute	FAST SLOW
Ch3	复位 / Reset	Reset	

DMX512通道 / 5ch:

DMX512 channel standard / 5ch:

Ch1	X轴旋转 (8 bit) X axis rotation (8 bit)	0° Rotation 350°	255°
Ch2	X-Y 旋转速度 X-Y speed	1-7 转/分 1-7 rotate / minute	FAST SLOW
Ch3	调光 / Dimming	10-100%	
Ch4	频闪 / Strobeflash	1-15f/s	
Ch5	复位 / Reset	Reset	

规格型号 Model type	射程 (白光) km Light distance (white color)	外观尺寸 mm Appearance size	包装尺寸 mm Package size	重量 kg Weight
GTK/DMX-XBO3000W	1~2	860 × 660 × 1350	860 × 660 × 1350	65
GTK/DMX-XBO4000W	2~3	860 × 660 × 1350	860 × 660 × 1350	75
GTK/DMX-XBO5000W	3~4	860 × 660 × 1350	860 × 660 × 1350	85
GTK/DMX-XBO7000W	4~6	860 × 660 × 1350	860 × 660 × 1350	98